



HYDRA-TECH PUMPS

6" HYDRAULIC SUBMERSIBLE SAND / SLURRY PUMP with AGITATOR

MODEL S6CSL

6" (150 mm) Discharge

The S6CSL pump is designed to use in applications requiring settled solids to be put into suspension and pumped with the discharge water. Primary applications include de-silting waterways. Other jobs may include filling sand bags to prevent beach erosion, tank and digester cleaning or pumping sediment from caissons.



FEATURES

- Hardened Alloy Wear Parts
- Built-in Agitator for stirring up solids
- Oil Lubricated Seals (can run dry)
- Variable Speed hydraulic drive
- Small Size allows pump to fit through a 22 inch opening
- Safe Hydraulic Drive can be used where electric power is hazardous or impractical
- Dependable gear type hydraulic motor
- Operates with our HT50 to HT75 power units or other hydraulic power sources capable of flows to 28 GPM

SPECIFICATIONS

WEIGHT:..... 495 lbs. (224 kg)
 HEIGHT:..... 39" (99 cm)
 WIDTH (@ widest point):..... 21 1/4" (54 cm)
 DISCHARGE:..... 6" NPT
 SOLIDS HANDLING:..... 1 1/2" (38 mm)
 HOSE PORTS:..... 1" NPT (F)
 VOLUTE*:..... Hardened Ductile Iron
 IMPELLER:..... High Chrome Alloy
 WEAR PLATE..... High Chrome Alloy
 AGITATOR:..... High Chrome Alloy
 SHAFT:..... Stainless Steel
 SHAFT SEALS: (upper)..... Silicon Carbide
 (Lower)..... Silicon Carbide
 HYDRAULIC OIL:..... 214-320 s.s.u. @ 100°F (64°C)
 INPUT FLOW:..... Max 28 GPM (106 LPM)
 OPERATING PRESSURE:.... Max 2800 PSI (190 Bar)
 POWER SOURCE:.. Any Open Center Hydraulic System

* Optional NI-Hard volute available for highly abrasive applications


B0109

Specifications are subject to change without notice




167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061
Website: www.hydra-tech.com E-Mail: htpump@hydra-tech.com

Model S6CSL Overall Dimensions

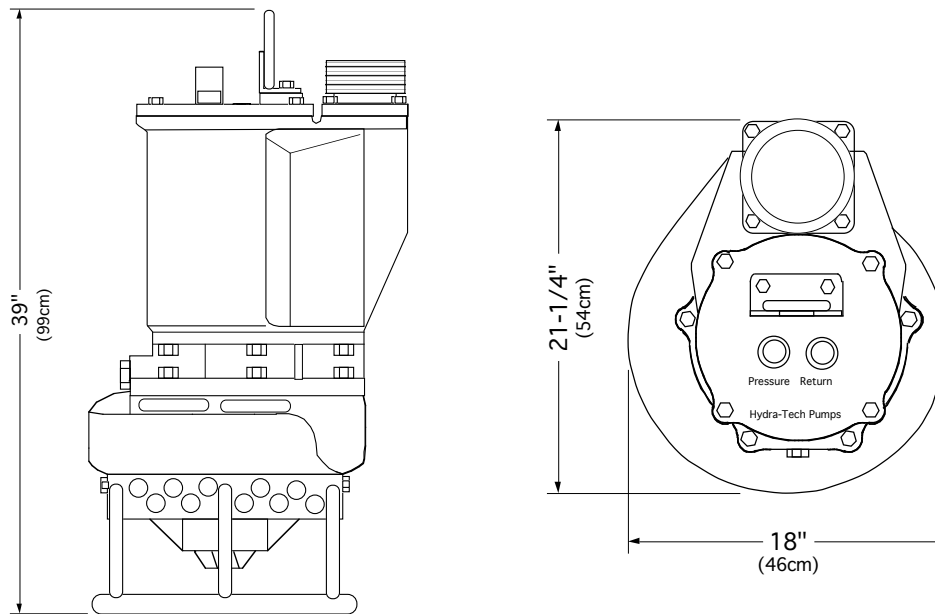

S6CSL Typical Performance

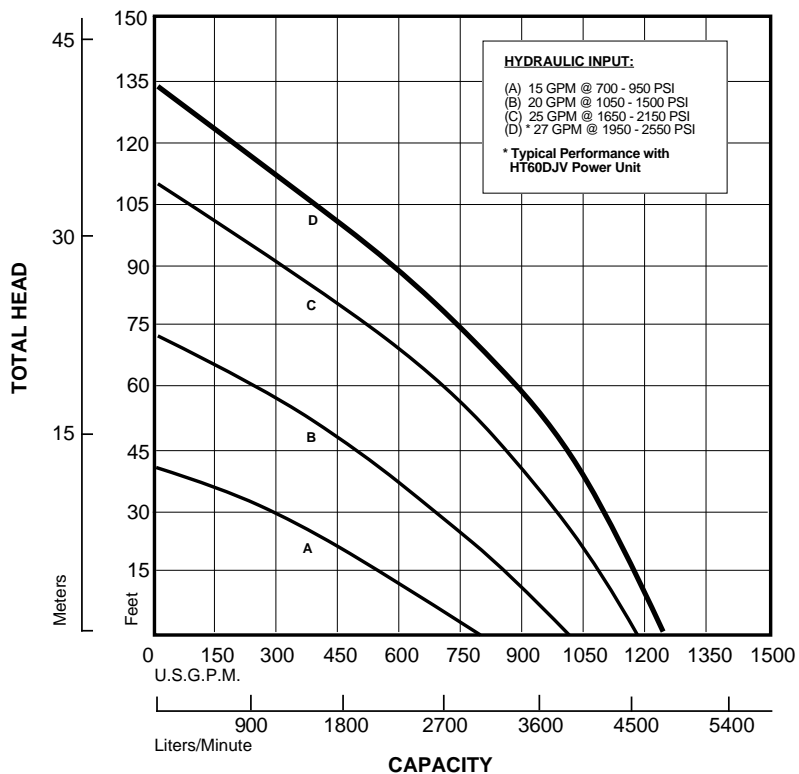

Curves are based on pumping water at 60°F. For performance curves other than shown above, consult factory.



167 Stock Street, Nesquehoning, PA 18240 Phone: 570-645-3779 Fax: 570-645-4061
 Website: www.hydra-tech.com E-Mail: htpump@hydra-tech.com